

## PRINTER SETTINGS (1/3)

HL-1210W series      Serial Number=U63982K3X872356  
Main Controller Main ROM Version: 1.20  
Engine Controller ROM Version: 1.06  
RAM Size = 32Mbyte

Paper Tray	User Settings
Tray Size	:Letter

General Setup	User Settings
Local Language	:English
Ecology	
-Sleep Indication	:Dimmed
-Auto Power Off	:Off
-Toner Save	:Off
Interface	
-Auto IF Time	:5 Sec
-Input Buffer	:Level4
Replace Toner	:Stop

Print Menu	User Settings
Auto Continue	:On
Print Position	
-X Offset	:0 Dots
-Y Offset	:0 Dots

PRINTER SETTINGS (2/3)


HL-1210W series Serial Number=UG3982K3X872356  
Main Controller Main ROM Version: 1.20  
Engine Controller ROM Version: 1.06  
RAM Size = 32MByte

Remaining life of :

\*Toner Cartridge



\*\*Drum Unit



<Device Status>  
Total Page Count: 64

<Total Pages Printed>  
A4/Letter: 64  
Legal/Folio: 0  
B5/Executive: 0  
A5: 0  
Others: 0


<Total Paper Jams: 1>  
Jam Tray: 0  
Jam Inside 1: 1  
Jam Inside 2: 0

<Error History (last 10 errors)>  
1: No Toner Page: 4  
2: Jam Inside 1 Page: 4  
3:  
4:  
5:  
6:  
7:  
8:  
9:  
10:

<Replace Count>  
Toner Cartridge: 0  
Drum Unit: 0

<Toner Kind>  
Inbox Toner

\* Remaining life will vary depending on the types of documents printed,  
their coverage and device usage.  
\*\* Based on A4/Letter printing.

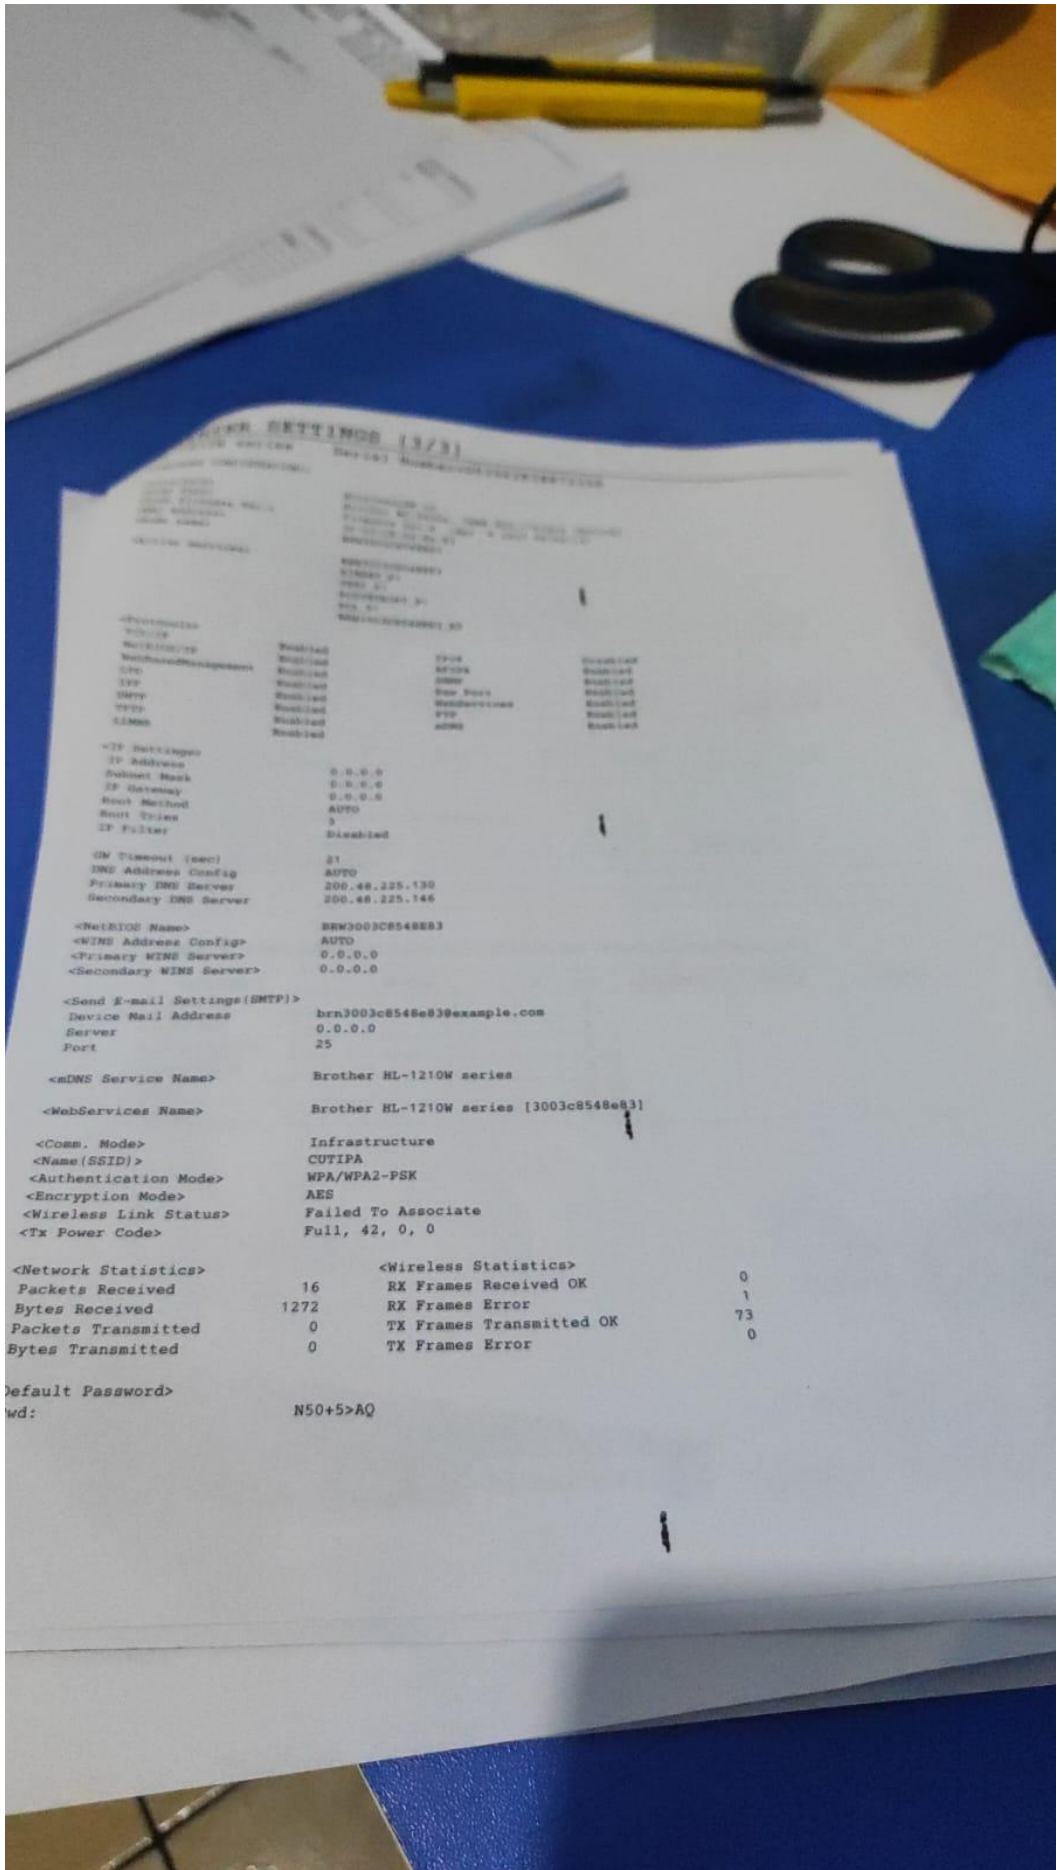

WIRELESS SETTINGS (3/3)

```

IP Settings
IP Address          0.0.0.0
Subnet Mask         0.0.0.0
IP Gateway         0.0.0.0
Route Method       AUTO
Route Tables       3
IP Filter          Disabled

DNS Timeout (sec)  31
DNS Address Config AUTO
Primary DNS Server 200.48.225.130
Secondary DNS Server 200.48.225.146

<NetBIOS Name>     BRW3003C8548E83
<WINS Address Config> AUTO
<Primary WINS Server> 0.0.0.0
<Secondary WINS Server> 0.0.0.0

<Send E-mail Settings (SMTP)>
Device Mail Address brn3003c8548e83@example.com
Server              0.0.0.0
Port                25

<DNS Service Name> Brother HL-1210W series
<WebServices Name> Brother HL-1210W series [3003c8548e83]

<Comm. Mode>      Infrastructure
<Name (SSID)>     CUTIPA
<Authentication Mode> WPA/WPA2-PSK
<Encryption Mode>  AES
<Wireless Link Status> Failed To Associate
<Tx Power Code>  Full, 42, 0, 0

<Network Statistics>
Packets Received    16
Bytes Received      1272
Packets Transmitted 0
Bytes Transmitted   0

<Wireless Statistics>
RX Frames Received OK 0
RX Frames Error       1
TX Frames Transmitted OK 73
TX Frames Error       0

Default Password>
wd:                N50+5>AQ

```